


## Trigonox F-CH40

tert-Butyl peroxyacetate, 40% solution in odorless mineral spirits

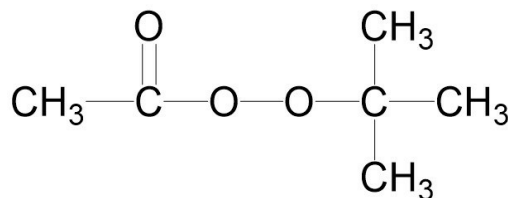

Polymerization of ethylene: Trigonox® F-CH40 is an efficient initiator for the ethylene polymerization under high pressure in both autoclave and tubular processes. To obtain a wide spectrum of polymerization temperatures, combinations with other peroxides are applied in practice. Depending on reaction conditions, Trigonox® F-CH40 is active in the temperature range between 215°C and 250°C. Polymerization of styrene: Trigonox® F-CH40 can be used for the (co)polymerization of styrene in the temperature range of 100-130°C. During polymerization the temperature is increased in steps.

CAS number  
107-71-1

EINECS/ELINCS No.  
203-514-5

TSCA status  
listed on inventory

Molecular weight  
132.2

Active oxygen content  
peroxide  
12.11%

### Specifications

Active oxygen	4.78-4.90 %
Appearance	Clear liquid
Assay	39.5-40.5 %
Hydroperoxides as TBHP	≤ 0.08 %

### Characteristics

Density, 20 °C	0.820 g/cm <sup>3</sup>
Viscosity, 10 °C	1.5 mPa.s

### Applications

Trigonox® F-CH40 can be used for the market segments: polymer production and acrylics production with their different applications/functions. For more information please check our website and/or contact us.

## Half-life data

The reactivity of an organic peroxide is usually given by its half-life ( $t^{1/2}$ ) at various temperatures. For Trigonox® F-CH40 in chlorobenzene half-life at other temperatures can be calculated by using the equations and constants mentioned below:

0.1 hr	at 139°C (282°F)
1 hr	at 119°C (246°F)
10 hr	at 100°C (212°F)
Formula 1	$k_d = A \cdot e^{-E_a/RT}$
Formula 2	$t^{1/2} = (\ln 2)/k_d$
Ea	149.36 kJ/mole
A	1.57E+16 s <sup>-1</sup>
R	8.3142 J/mole·K
T	(273.15+°C) K

## Thermal stability

Organic peroxides are thermally unstable substances, which may undergo self-accelerating decomposition. The lowest temperature at which self-accelerating decomposition of a substance in the original packaging may occur is the Self-Accelerating Decomposition Temperature (SADT). The SADT is determined on the basis of the Heat Accumulation Storage Test.

SADT	60°C (140°F)
Method	The Heat Accumulation Storage Test is a recognized test method for the determination of the SADT of organic peroxides (see Recommendations on the Transport of Dangerous Goods, Manual of Tests and Criteria - United Nations, New York and Geneva).

## Storage

Due to the relatively unstable nature of organic peroxides a loss of quality can be detected over a period of time. To minimize the loss of quality, Nouryon recommends a maximum storage temperature ( $T_s$  max. ) for each organic peroxide product.

Ts Max.	10°C (50°F)
Ts Min.	-5°C ( 23°F) to prevent phase separation
Note	When stored under these recommended storage conditions, Trigonox® F-CH40 will remain within the Nouryon specifications for a period of at least 3 months after delivery.

## Packaging and transport

The standard packaging of Trigonox® F-CH40 is a 1000 l Intermediate Bulk Container (IBC). Both packaging and transport meet the international regulations. For the availability of other packed quantities consult your Nouryon representative. Trigonox® F-CH40 is classified as Organic peroxide type F; liquid, Division 5. 2; UN 3109.

## Safety and handling

Keep containers tightly closed. Store and handle Trigonox® F-CH40 in a dry well-ventilated place away from sources of heat or ignition and direct sunlight. Never weigh out in the storage room. Avoid contact with reducing agents (e. g. amines), acids, alkalis and heavy metal compounds (e. g. accelerators, driers and metal soaps). Please refer to the Safety Data Sheet (SDS) for further information on the safe storage, use and handling of Trigonox® F-CH40. This information should be thoroughly reviewed prior to acceptance of this product. The SDS is available at [nouryon.com/sds-search](http://nouryon.com/sds-search).

## Major decomposition products

Carbon dioxide, Acetone, Methane, tert-Butanol,

All information concerning this product and/or suggestions for handling and use contained herein are offered in good faith and are believed to be reliable. Nouryon, however, makes no warranty as to accuracy and/or sufficiency of such information and/or suggestions, as to the product's merchantability or fitness for any particular purpose, or that any suggested use will not infringe any patent. Nouryon does not accept any liability whatsoever arising out of the use of or reliance on this information, or out of the use or the performance of the product. Nothing contained herein shall be construed as granting or extending any license under any patent. Customer must determine for himself, by preliminary tests or otherwise, the suitability of this product for his purposes. The information contained herein supersedes all previously issued information on the subject matter covered. The customer may forward, distribute, and/or photocopy this document only if unaltered and complete, including all of its headers and footers, and should refrain from any unauthorized use. Don't copy this document to a website.

Trigonox® is a registered trademark of Nouryon Functional Chemicals B.V. or affiliates in one or more territories.

## Contact Us

Polymer Specialties Americas  
[polymer.amer@nouryon.com](mailto:polymer.amer@nouryon.com)

Polymer Specialties Europe, Middle East, India and Africa  
[polymer.emeia@nouryon.com](mailto:polymer.emeia@nouryon.com)

Polymer Specialties Asia Pacific  
[polymer.apac@nouryon.com](mailto:polymer.apac@nouryon.com)

The Nouryon logo consists of a stylized blue 'N' followed by the word 'ouryon' in a lowercase, sans-serif font. The 'N' is significantly larger and more prominent than the rest of the text.